


High Speed Multi-Layer Extruder & Cutting Machine

| EDC-16-05 |

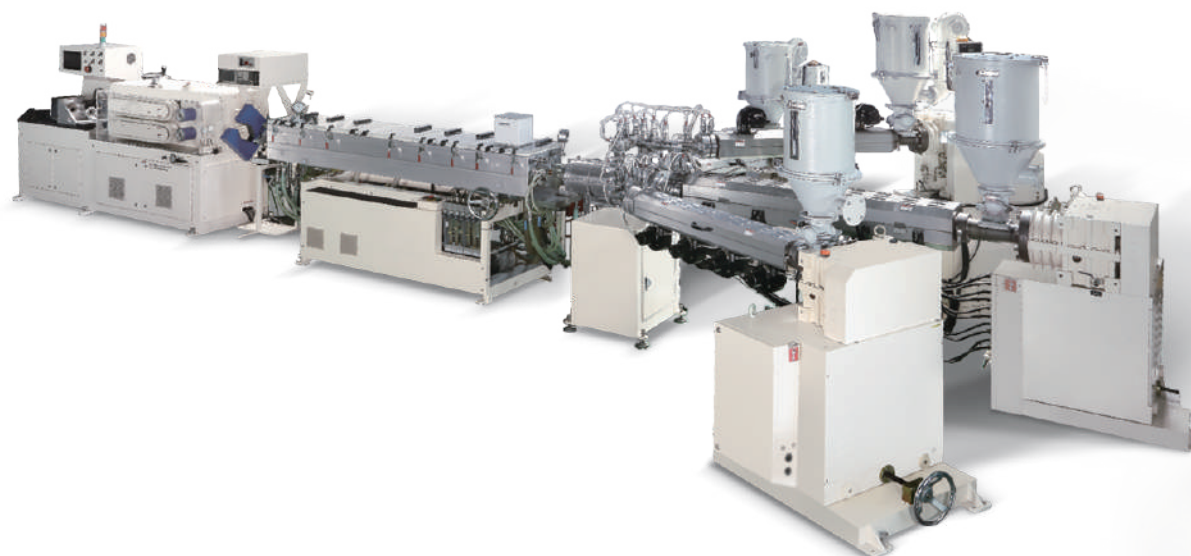

Features

1. High precision thickness control on each layer of tube.
2. Quick tooling change by one operator.
3. Automatic outer diameter and thickness control device.
4. Low power consumption and high production efficiency.



Main Specifications

Screw Dia (inner)	Ø60 mm, L/D : 30/1
Screw Dia (resin)	Ø45 mm, L/D : 32/1
Screw Dia (EVOH)	Ø38 mm, L/D : 26/1
Screw Dia (outer)	Ø45 mm, L/D : 33/1
Screw Type	Full Flight
Thickness Tolerance	± 0.015 mm
Length Tolerance	± 0.4 mm
Motor	40 HP x 1 pc, 15 HP x 2 pcs 7.5HP x 1pc, 5 HP x 1 pc

Water Consumption	80 L/min, 15~20°C
Max Power Consumption	150 kw/hour
Operation Power Consumption	31.5 kw/hour
Extrusion Linear Speed	Max 20 m/min (Ø35 mm)
Cutting Speed	Max 200 pcs/min
Tube Dia Range	Ø19~50 mm
Machine Size	9450 x 4600 x 2350 mm
Machine Weight	8700 kgs
Materials	LDPE, LLDPE, MDPE, HDPE

Head Office

BONMART ENTERPRISE CORP.
Tel: 886-2-2299-4281 Fax: 886-2-2299-4284
E-mail: bonmart@bonmart.com.tw

Branch

XIAMEN CHINA BRANCH OFFICE
Tel: 86-592-2916-137 / 2916-053 Fax: 86-592-5362-039
E-mail: bonmart@bonmart.com.tw

