


Fully Automatic Heading Machine

| RIH-40-04 |

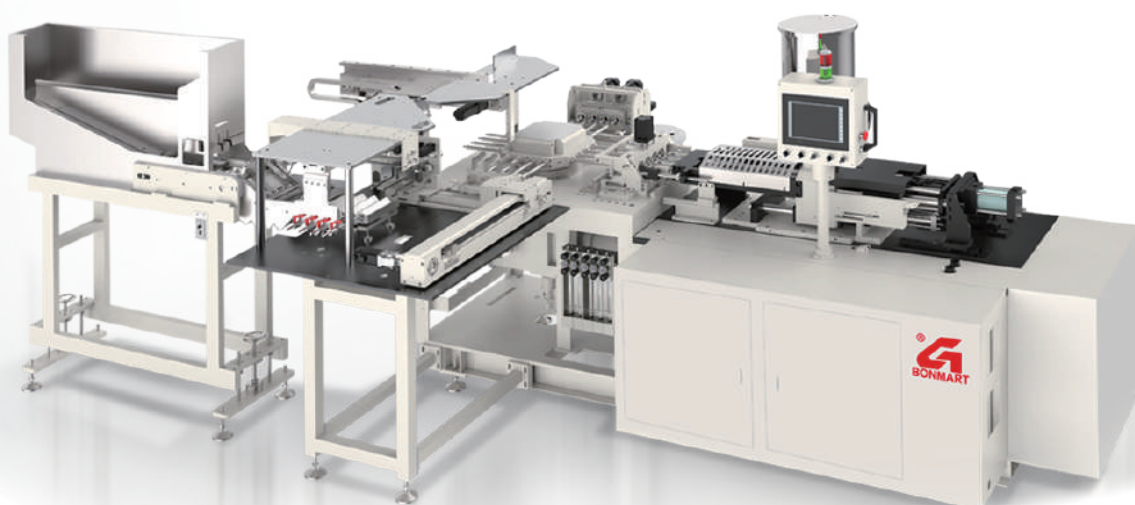


Features

1. Materials: LDPE, LLDPE, MDPE, HDPE, PCR / PIR / Bio.
2. Fully servo electric or servo-hydraulic model.
3. Different application: round or oval for pe tubes / laminate tubes.
4. User-friendly and modern operating panel.
5. Orientation function for printed tube.
6. Drilling function for various sizes of orifice.
7. Safety protection device during production.
8. Production data saving.

Main Specifications

Tube Diameter Range	Ø19 ~ 50 mm
Tube Length : Normal	50 ~ 215 mm
Oval	70 ~ 215 mm
Heading Speed	20 ~ 40 pcs / min
Orifice : Cutting	Ø1.5 ~ 8 mm
Drilling	Ø4 ~ 13 mm
Standard Voltage	220 / 380 Voltage, 50 / 60 HZ


STYLES OF TUBE HEADS

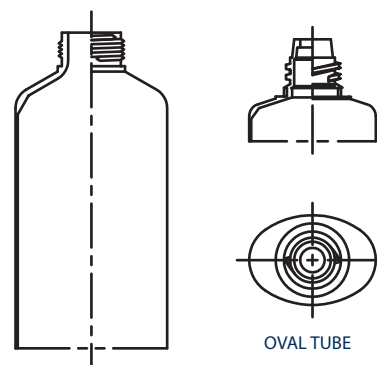

STANDARD HEAD WITH THREAD

OVAL TUBE

Power Consumption	20 kw / 1 Hour
Air Consumption	500 L / min
Water Consumption	80 ~ 120 L / min
Water Temp	15 ~ 18 degrees
Machine Size	3,700 x 2,400 x 1,750 mm
Machine Weight	2,500 kg
PLC	LS Control PLC

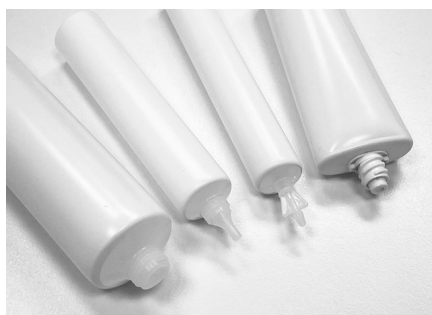

Head Office

BONMART ENTERPRISE CORP.
Tel: 886-2-2299-4281 Fax: 886-2-2299-4284
E-mail: bonmart@bonmart.com.tw

Branch

XIAMEN CHINA BRANCH OFFICE
Tel: 86-592-2916-137 / 2916-053 Fax: 86-592-5362-039
E-mail: bonmart@bonmart.com.tw

