

Fully Automatic Heading Machine

| RIH-60-06 |




Features

1. Materials: LDPE, LLDPE, MDPE, HDPE, PCR / PIR / Bio.
2. Fully servo electric or servo-hydraulic model.
3. Different application: round or oval for pe tubes / laminate tubes.
4. User-friendly and modern operating panel.
5. Orientation function for printed tube.
6. Drilling function for various sizes of orifice.
7. Safety protection device during production.
8. Production data saving.

Main Specifications


Tube Diameter Range	Ø19 ~ 50 mm
Tube Length : Normal	50 ~ 215 mm
Oval	70 ~ 215 mm
Heading Speed	40 ~ 60 pcs/min
Orifice : Cutting	Ø1.5 ~ 8 mm
Drilling	Ø4 ~ 13 mm
Standard Voltage	220 / 380 Voltage, 50 / 60 HZ

| STYLES OF TUBE HEADS |

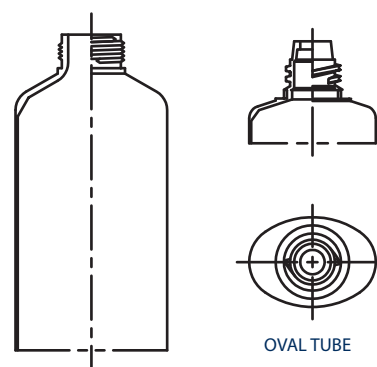

STANDARD HEAD WITH THREAD

OVAL TUBE

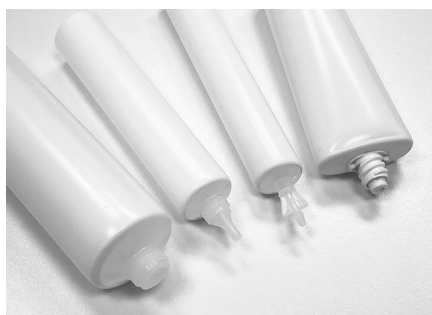

Head Office

BONMART ENTERPRISE CORP.
Tel: 886-2-2299-4281 Fax: 886-2-2299-4284
E-mail: bonmart@bonmart.com.tw

Branch

XIAMEN CHINA BRANCH OFFICE
Tel: 86-592-2916-137 / 2916-053 Fax: 86-592-5362-039
E-mail: bonmart@bonmart.com.tw

