




Multi-Layer Extruder & Cutting Machine

| EDC-08-05 |

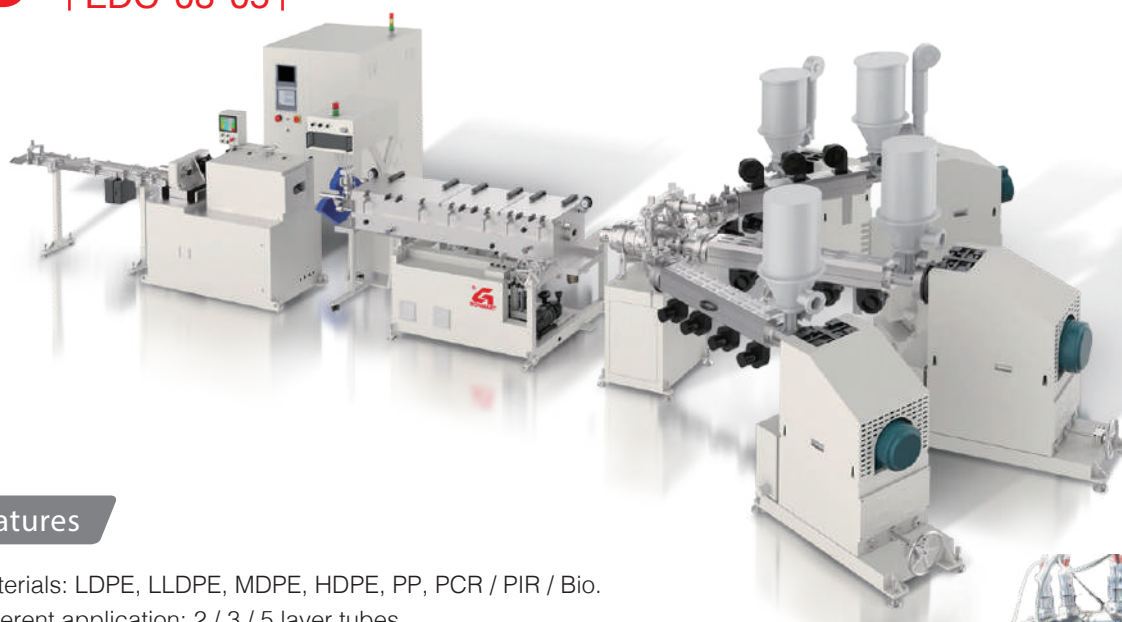

Features

1. Materials: LDPE, LLDPE, MDPE, HDPE, PP, PCR / PIR / Bio.
2. Different application: 2 / 3 / 5 layer tubes.
3. High quality die head eliminate thickness variation.
4. Power and cost saving.
5. Fast color change time & minimum production waste.
6. Fast tool change time.
7. Production data saving & recording.
8. Diameter control by laser head & automatic vacuum vale.

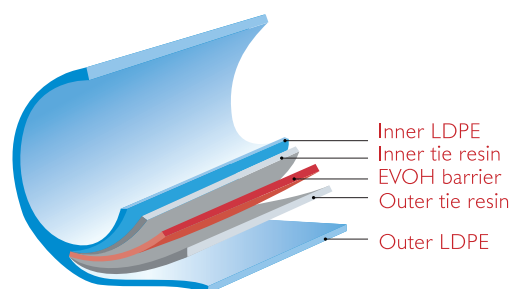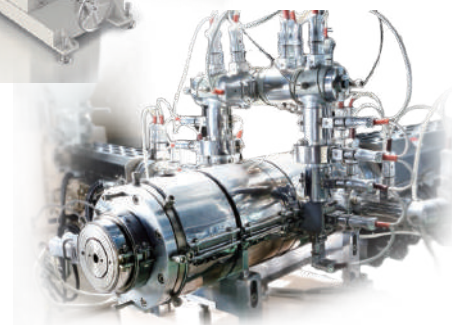

Main Specifications

Screw Dia (inner)	Ø45 mm, L / D : 33 / 1	Extrusion Linear Speed	8 m / min (Ø50 mm)
Screw Dia (resin)	Ø35 mm, L / D : 32 / 1		10 m / min (Ø35 mm)
Screw Dia (EVOH)	Ø30 mm, L / D : 26 / 1		12 m / min (Ø19 mm)
Screw Dia (outer)	Ø40 mm, L / D : 32 / 1	Cutting Speed	150 pcs / min
Screw Type	Full Flight	Tube Dia Range	Ø16 ~ 60 mm
Motor	15 HPx1 pc, 5 HPx2 pcs, 10 HPx1 pc	Machine Size	7000 x 3500 x 2300 mm
Water Consumption	Ice water : 120 L / min, 5~100C	Total New Weight	approx. 5200 kg
Air Consumption	10 L / min	Cutter PLC	Delta
Power Consumption	95.5 kw		

Head Office

BONMART ENTERPRISE CORP.
Tel: 886-2-2299-4281 Fax: 886-2-2299-4284
E-mail: bonmart@bonmart.com.tw

Branch

XIAMEN CHINA BRANCH OFFICE
Tel: 86-592-2916-137 / 2916-053 Fax: 86-592-5362-039
E-mail: bonmart@bonmart.com.tw

